

conecto Elasto

Expansion joint consist of aluminum clamps connected by an elastomer rubber.

The elastomer component is made of modified PVC for better durability resistance to UV and aggressive chemicals.

Confined cover is a significant advantage of the system.

With a small minimum installation height, the system can be used without grooving for 3 mm PVC carpets, 5 mm textile carpets, or tile slabs.

Joints perfectly suit as flush mounted floor, wall and ceiling applications.

Elastomer types:



EL 30.06



EL 50.08




EL 65.10




10 colors of rubber

rubber


footer

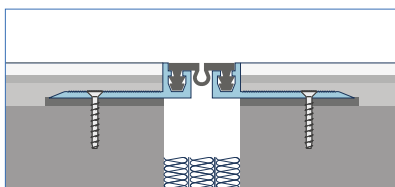

groove version

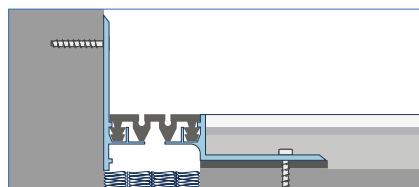

corner version

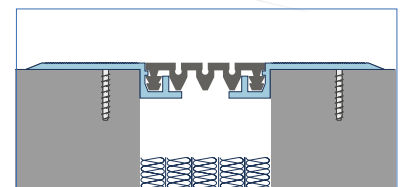

cover version

Conecto Elasto	Visible element (mm)	Gap width (mm)	Base width (mm)	Installation height (mm)	Material type	Maximum load (kN)	Horizontal/Vertical compensation (mm)
EL.30.6	30	30	150	N,5,7,10,12,14,20,30,50,60,70,CV	aluminum, modified PVC	30	12 (± 6) 12 (± 6)
EL. 50.8	50	50	175	N,5,7,10,12,14,20,30,50,60,70,CV	aluminum, modified PVC	30	16(± 8) 16(± 8)
EL.65.10	65	65	185	N,5,7,10,12,14,20,30,50,60,70,CV	aluminum, modified PVC	30	20 (± 10) 20 (± 10)

N - cover version, CV - corner version